


Quick Install excl. light source


Technical data

Voltage	220-240 VAC 50 Hz
Light source	Max. 7.5W LED Max. 56 mm high
Carving dimensions	Ø75 mm
Installation height	63 mm
Exterior dimensions	Ø87 mm
Dimensions connector box	L: 85 mm, W: 55 mm, H: 30 mm
Tilt angle	30°
Possibility of through wiring	Yes, 5G1.5
IP-class	IP44 (depends on the light source)
Insulation class	Class II
Material	Aluminium, plastic
Environment	Indoors
Warranty	2 years
Approvals	CE

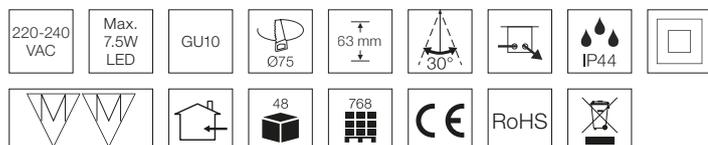

Product information

- Approved for installation directly in the insulation and flammable materials
- Quick and easy mounting
- Mounting with screws
- Screwless terminal block in the connector box
- Possibility of mounting with cable or 16 mm flex tube
- Sealing ring included, in case of a vapour barrier penetration
- Adjustable screws for ceiling thickness up to 50 mm

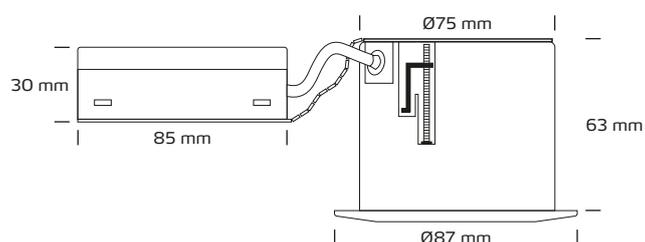

*The drawing is not drawn to scale

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

Item no.	EAN no.	Colour	Front design
1201	5704629012011	White	Round
1202	5704629012028	Brushed alu	Round
1205	5704629012059	Matt white	Round
1209	5704629012097	Matt black	Round