


Uni Install Dimmer excl. light source




Technical data

Voltage	220-240 VAC 50 Hz
System effect	Max. 7.5W LED
Dimmable	Yes, trailing edge
Carving dimensions	Ø75 mm
Installation height	63 mm
Exterior dimension	Ø87 mm / 87 x 87 mm
Dimensions connector box	L: 93 mm, W: 45 mm, H: 22 mm
Tilt angle	30°
Possibility of through wiring	Yes, 3G1.5
IP-class	IP44 (depends on the light source)
Insulation class	Class II
Material	Aluminium, plastic
Environment	Indoors
Warranty	5 years
Approvals	CE

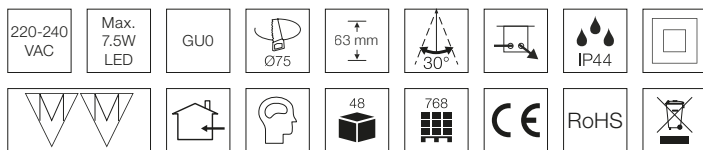


Product information

- Approved for installation directly in the insulation and flammable materials
- Low mounting depth
- Built-in LED dimmer (trailing edge)
- Max. load dimmer: 120W
- Adjustable min. setting for dimming
- Memory function for dimming
- Quick and easy mounting
- Mounting with screws or adjustable springs
- Screwless terminal block in the connector box
- Possibility of mounting with cable or 16 mm flex tube
- Adjustable springs for ceiling thickness up to 44 mm
- Adjustable screws for ceiling thickness up to 35 mm
- Designed and developed in Denmark

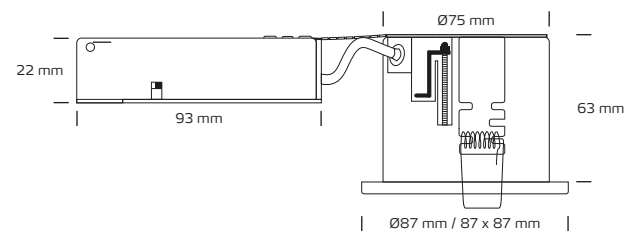

*The drawing is not drawn to scale

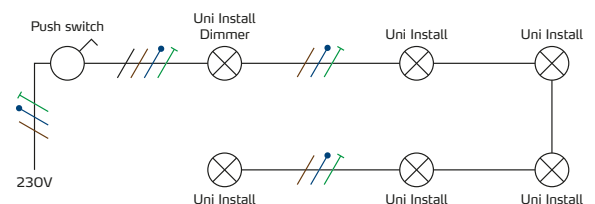

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

Item no.	EAN no.	Colour	Front design
11221	5704629112216	Matt white	Round
11222	5704629112223	Brushed alu	Round
11223	5704629112230	Matt white	Square
11224	5704629112247	Brushed alu	Square
11227	5704629112278	Chrome	Round
11228	5704629112285	White	Round
11229	5704629112292	White	Square
11230	5704629112308	Matt black	Round