




# Uni Install Dimmer outdoor excl. light source

## Technical data

Voltage	220-240 VAC 50 Hz
System effect	Max. 7.5W LED
Dimmable	Yes, trailing edge
Carving dimensions	Ø75 mm
Installation height	63 mm
Exterior dimensions	Ø87
Dimensions connector box	L: 93 mm, B: 55 mm, H: 22 mm
Tilt angle	30°
Possibility of through wiring	Yes, 3G1,5
IP-class	IP44 (depends on the light source)
Insulation class	Class II
Material	Plastic, acid resistant stainless steel AISI 316
Environment	Outdoors
Warranty	5 years
Approvals	CE

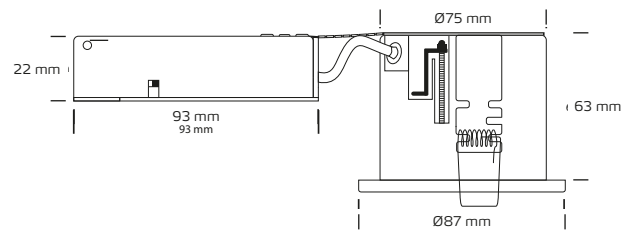

\*The drawing is not drawn to scale

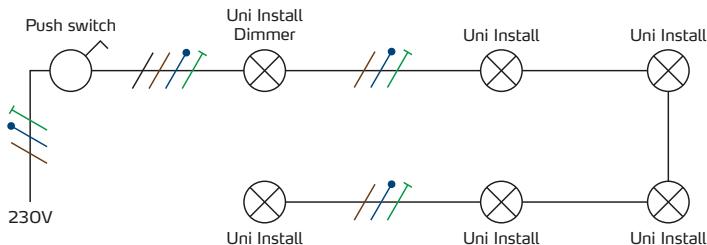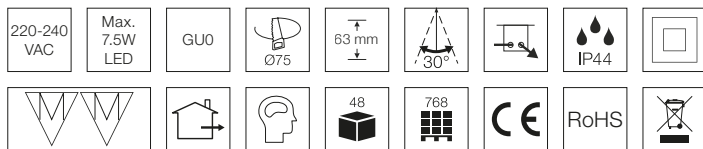

## Product information

- Approved for installation directly in the insulation and flammable materials
- Low mounting depth
- Built-in LED dimmer (trailing edge)
- Max. load dimmer: 120W
- Adjustable min. setting for dimming
- Memory function for dimming
- Quick and easy mounting
- Mounting with screws or adjustable springs
- Screwless terminal block in the connector box
- Possibility of mounting with cable or 16 mm flex tube
- Adjustable springs for ceiling thickness up to 44 mm
- Adjustable screws for ceiling thickness up to 35 mm
- Designed and developed in Denmark

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

Item no.	EAN no.	Colour	Front design
11293	5704629112936	White	Round
11294	5704629112940	Brushed steel	Round
11299	5704629112995	Black	Round