


Technical data


Voltage	220-240 VAC 50/60 Hz
System effect	Max. 7.5W LED
Cut out dimension	Ø75 mm
Installation height	63 mm
Exterior dimensions	Ø83 mm
Dimension connector box	L: 62.5 mm, W: 44 mm, H: 26 mm
Tilt angle	30°
Possibility of through wiring	Yes, 2 x 3G1.5 mm ²
Operating temperature	-20° - +45°
IP rating	IP44 (depends on the light source)
Insulation class	Class II
Material	Aluminium, plastic
Environment	Indoor and outdoor
Warranty	10 years
Approvals	CE

Product information

- Produced from a minimum of 85% recycled materials
- Approved for installation directly in the insulation and flammable materials
- Low mounting depth – 63 mm
- Quick and easy mounting with screws or adjustable springs
- 3-pole levers in the connector box
- Possibility of mounting with cable or 16 mm flex tube
- Adjustable springs for ceiling thickness up to 44 mm
- Adjustable screws for ceiling thickness up to 35 mm

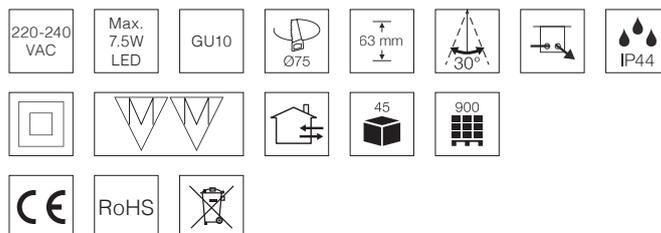

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

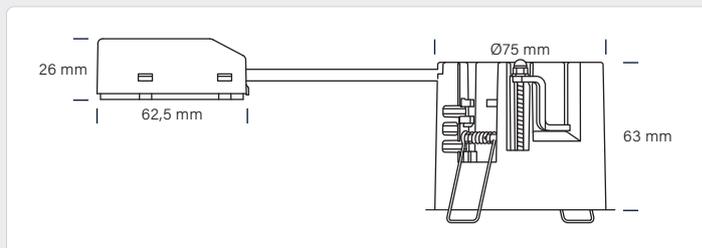

Uni Install G2 | without front

Item no.	EAN no.	Design	Environment	Warranty, product / surface
12200000	5704629005556	without front	indoor and outdoor	10 years

Front

Item no.	EAN no.	Design / colour	Environment	Warranty, product / surface
70010000	5704629005563	○ matt white (RAL 9010)	indoor and outdoor	10 years
70020000	5704629005587	○ brushed alu	indoor	10 years
70920000	5704629005594	○ brushed alu	outdoor	10 years / 7 years
70090000	5704629005624	○ matt black (RAL 9005)	indoor and outdoor	10 years
70030000	5704629005600	□ matt white (RAL 9010)	indoor and outdoor	10 years
70040000	5704629005617	□ brushed alu	indoor	10 years
70900000	5704629005891	□ matt black (RAL 9005)	indoor and outdoor	10 years
70070000	5704629005631	○ chrome	indoor	10 years / 7 years
70080000	5704629005648	○ copper	indoor	10 years / 7 years