


Technical data

Voltage	220-240 VAC 50/60 Hz
System effect	1W
Expected lifespan	50,000 hours
Exterior dimension	53 x 20 mm
Cable length	150 mm
Operating temperature	-20° - +50°
Storage temperature	-20° - +70°
IP rating	IP21
IK rating	IK10
Insulation class	Class II
Material	Aluminium, plastic
Environment	Indoor and outdoor
Warranty	2 years
Approvals	CE

Product information

- Approved for installation directly in insulation and flammable materials
- Can be included as part of the permanent installation (2 x 1,5 mm²)
- Helps the problems with the dimming, such as flickering, blinking or in the situations when LED-lighting does not turn off 100% by switching
- For mounting on the primary side (220-240VAC), in parallel with the LED downlight or LED driver

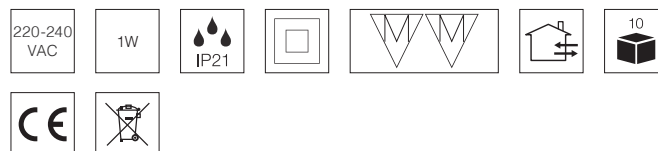

Item no.	EAN no.	Type
18760000	5704629004764	active load

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.