




Linea 2.3W, 3000K

Technical data

Amperage	350mA
System effect	2.3W
Light source	LED
Colour temperature	3000 Kelvin
Light intensity	166 Lumen
Colour rendering	CRI>90
Expected lifespan	15,000 hours L70 B50
Dimmable, how	No
Flicker free	Yes, according to the new Ecodesign / ErP directive (September 2021)
SVM <0.4	Ja
PstLM <1	Ja
SDCM	<6
Beam angle	100°
Carving dimensions	Ø63 mm
Installation height	11 mm
Exterior dimensions	Ø68 mm
Operating temperature	-10° / +40°
Possibility of through wiring	No
IP-class	IP20
Insulation class	Class III
Material	Downlight: polycarbonat Mounting ring: aluminium
Environment	Indoors
Warranty	2 years with Nordtronic driver, item no. 98514021
Approvals	CE

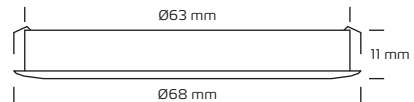


*The drawing is not drawn to scale

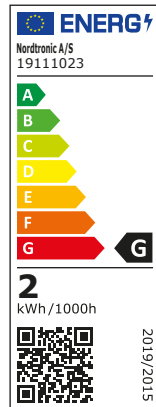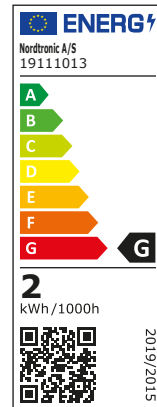

Product information

- Low height only 11 mm
- High colour rendering index (CRI)
- Flicker free according to the new Ecodesign / ErP directive (September 2021)
- Incl. mounting ring
- Incl. 2.5 meter cable with plug

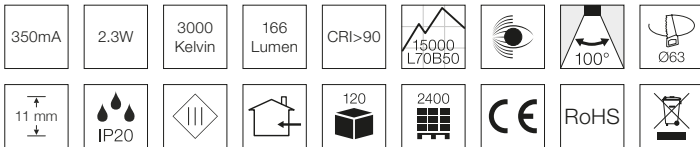

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

Item no.	EAN no.	Colour	Front design
19111013	5704629001008	Matt white	Round
19111023	5704629001015	Brushed alu	Round

Accessories

Item no.	EAN no.	Variant
98514021	5704629001060	LED Driver - not dimmable, 2.5-14W 350mA