



## Linea kit 3 x 2.3W, 3000K

### Technical data


Amperage	350mA
System effect	3 x 2.3W
Light source	2W LED, item no. 19111013 2W LED, item no. 19111023 <span style="float: right;">G</span>
Colour temperature	3000 Kelvin
Light intensity	3 x 166 Lumen
Colour rendering	CRI>90
Expected lifespan	15.000 hours L70 B50
Dimmable	No
Flicker free	Yes, according to the new Ecodesign / ErP directive (September 2021)
SVM <0.4	Yes
PstLM <1	Yes
SDCM	<6
Beam angle	100°
Carving dimensions	Ø63 mm
Installation height	11 mm
Exterior dimensions	Ø68 mm
Dimensions driver	L: 125 mm, W: 41 mm, H: 23 mm
Dimensions distribution box	L: 51 mm, W: 30 mm, H: 16 mm
Operating temperature	-10° / +40°
Possibility of through wiring	No
IP-class	IP20
Insulation class	Class III
Material	Downlight: polycarbonat Mounting ring: aluminium
Environment	Indoors
Warranty	2 years
Approvals	CE



\*The drawing is not drawn to scale

### Product information

- Low height only 11 mm
- High colour rendering index (CRI)
- Flicker free according to the new Ecodesign / ErP directive (September 2021)
- Incl. mounting ring
- Incl. driver for up to 6 spots (6 x 2.3W)
- Incl. 2.5 meter cable with plug
- Switch on 230Vac wire

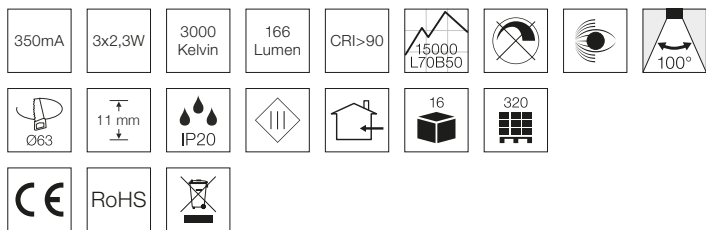

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

Item no.	EAN no.	Colour	Front design
19112013	5704629001046	Matt white	Round
19112023	5704629001053	Brushed alu	Round