


Zita 36W, 3000K


Technical data

Hole diameter:	Ø150 mm
Height:	133 mm
Front size:	Ø165 mm
Amperage / voltage:	900mA / 36V
System effect:	36W
Light source:	Integrated CITIZEN LED, 3000 Kelvin
Light intensity:	2800 Lumen
Colour rendering:	CRI>90
SDCM:	4
Beam angle:	70°
Dimmable:	Yes
IP-class:	IP20 / IP44 (is intended for installation in areas 1 and 2)
Insulation class:	Class III / II
Material:	Plastic, aluminium
Possibility of through wiring:	5-pole connector box for loop in and out with DALI / Push and mains
Colour code:	RAL 9003

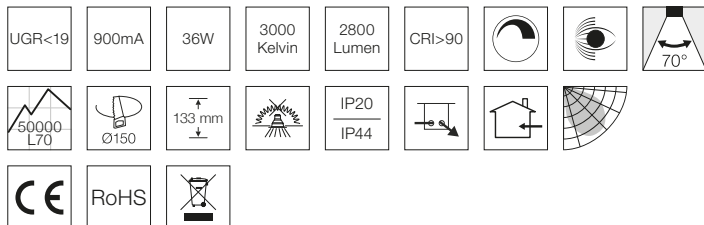


Product information

- UGR<19
- FlickerFree
- DALI / PUSH Cc driver
- Quick and easy mounting
- Mounting with springs
- Screwless terminal block in the connector box
- Possibility of mounting with cable or 16 mm flex tube
- Ceiling thickness for mounting is up to 40 mm

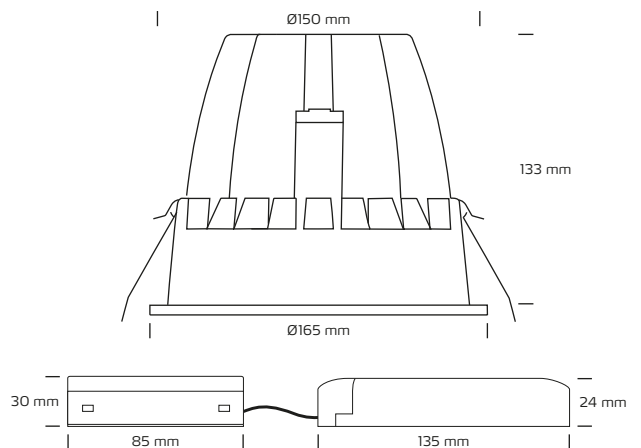

*The drawing is not drawn to scale



This luminaire contains built-in LED lamps.

A++

A+

A


B

C


D

E

LED



The lamps cannot be changed in the luminaire.



LED downlight

874/2012

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

Item no.	EAN no.	Colour	Front design
20113013	5704629000582	Matt white (RAL 9003)	Round