
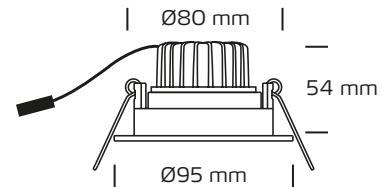


# Velia PRO Tilt 11W Dim to Warm

## Technical data

Amperage	350mA
System effect	11W
Light source	Dim to Warm 11W LED, item no. 31120007 <span style="border: 1px solid black; padding: 2px;">G</span>
Colour temperature	1800-3000 Kelvin
Light intensity	850 Lumen
Colour rendering	CRI>95
Expected lifespan	50,000 hours L90 B10 100,000 hours L70 B50
Dimmable	Yes, using recommended drivers
Flicker free	Yes, according to the new Ecodesign / ErP directive
SVM <0.4	Yes
PstLM <1	Yes
SDCM	<3
Beam angle	38°
Carving dimensions	Ø80 mm
Installation height	54 mm
Exterior dimensions	Ø95 mm / 95 x 95 mm
Tilt angle	30°
IP-class	IP44 (is intended for installation in areas 1 and 2)
Insulation class	Class III
Material	Plastic, aluminium, glass
Environment	Indoor
Warranty, product / surface	5 years with Nordtronic driver
Approvals	CE

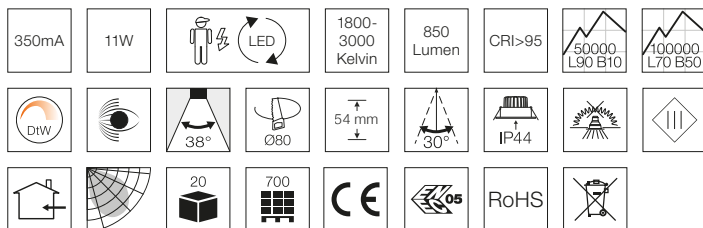

\*The drawing is not drawn to scale

## Product information

- High colour rendering index (CRI)
- High lumen output
- Glare free
- Flicker free according to the new Ecodesign / ErP directive when using recommended drivers
- Colour temperature (Kelvin) changes by dimming
- Mounting with springs
- Quick and easy mounting
- Ceiling thickness for mounting is up to 26 mm

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

Item no.	EAN no.	Colour	Front design
30112017	5704629002050	Matt white	Round
30112097	5704629002067	Matt black	Round

## Drivers

Item no.	EAN no.	Type
98554023	5704629002500	Dimmable 9-13W
98525035	5704629000605	Dali / Push dim