


Alina 90° 2.2W, 2700K

Technical data


Amperage	350mA
System effect	2.2W
Light source	LED
Colour temperature	2700 Kelvin
Light intensity	185 Lumen
Colour rendering	CRI>90
Expected lifespan	50,000 hours
Dimmable, how	Depends on driver
Flicker free	Yes, according to the new Ecodesign / ErP directive (September 2021)
SVM <0.4	Yes
PstLM <1	Yes
SDCM	≤3
Beam angle	90°
Carving dimensions	Ø55 mm
Installation height	12 mm
Exterior dimensions	Ø70 mm
Possibility of through wiring	No
IP-class	IP44 (is intended for installation in areas 1 and 2)
Insulation class	Class III
Material	Aluminium, plastic
Environment	Indoors
Warranty	2 years with Nordtronic driver
Approvals	CE

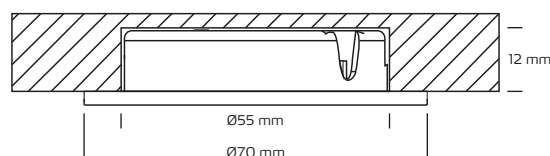

*The drawing is not drawn to scale

Product information

- Approved for installation directly in the insulation and flammable materials
- Low mounting depth
- Suitable for installation in porous material
- Light weight
- Connector on the lamp housing
- Dimmable with Nordtronic LED driver
- Incl. 3 meter cable with plug in both ends
- Designed and developed in Denmark

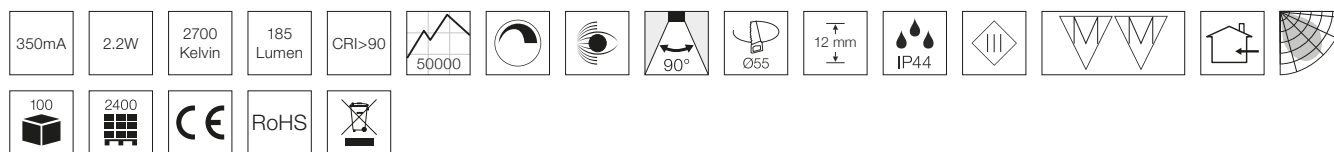

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

Item no.	EAN no.	Colour	Front design
3101	5704629031012	Matt white	Round
3102	5704629031029	Brushed alu	Round

Accessories

Item no.	EAN no.	Variant
1872	5704629018723	LED Driver dimmable, 5-16W
1883	5704629018839	LED Driver non dimmable, 2-20W
1875	5704629018754	Extention cable 2 m
3121	5704629031210	Mounting ring matt white
3122	5704629031227	Mounting ring brushed alu