
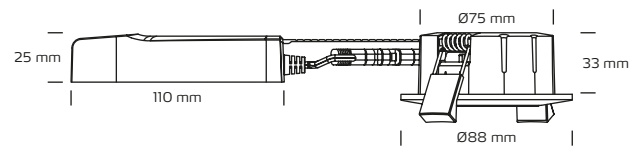


Low Profile ECO 6W, 2700K

Technical data

Voltage	220-240 VAC 50 Hz
System effect	6W
Light source	LED
Colour temperature	2700 Kelvin
Light intensity	420 Lumen
Colour rendering	CRI>90
Glare	UGR<19
Expected lifespan	50,000 timer
Dimmable, how	Yes, trailing edge
Flicker free	Yes, according to the new Ecodesign / ErP directive (September 2021)
SVM <0.4	Yes
PstLM <1	Yes
SDCM	≤3
Beam angle	36°
Carving dimensions	Ø75 mm
Installation height	33 mm
Exterior dimensions	Ø88 mm
Dimensions driver	L: 110 mm, W: 46 mm, H: 25 mm
Tilt angle	40°
Operating temperature	-20° - 45°
Possibility of through wiring	Yes, 3G1.5 - 30 pcs.
IP-class	IP54 (is intended for installation in areas 1 and 2)
Insulation class	Class II
Material	Aluminium, polycarbonat
Environment	Indoors
Warranty	3 years
Approvals	CE

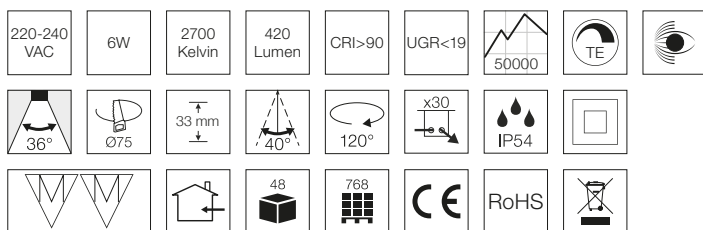

*The drawing is not drawn to scale

Product information

- Approved for installation directly in the insulation and flammable materials
- High colour rendering index (CRI)
- High lumen output
- Glare free
- Flicker free according to the new Ecodesign / ErP directive (September 2021)
- Mounting with springs
- Low mounting height
- Comes with removable driver, which makes it easy to connect the downlight for example after painting of the ceiling
- Quick and easy mounting
- Screwless terminal block in the connector box
- Ceiling thickness for mounting is up to 26 mm
- Swivel front - 120°

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

Item no.	EAN no.	Colour	Front design
32111012	5704629001084	Matt white (RAL 9016)	Round
32111022	5704629001114	Brushed alu	Round
32111002	5704629001145	Grey (RAL 9006)	Round
32111092	5704629001176	Matt black (RAL 9005)	Round