
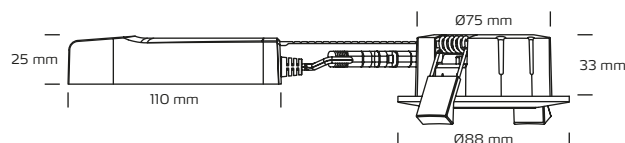


Low Profile ECO 6W, 4000K

Technical data

| | |
|-------------------------------|--|
| Voltage | 220-240 VAC 50 Hz |
| System effect | 6W |
| Light source | LED |
| Colour temperature | 4000 Kelvin |
| Light intensity | 450 Lumen |
| Colour rendering | CRI>90 |
| Glare | UGR<19 |
| Expected lifespan | 50,000 timer |
| Dimmable, how | Yes, trailing edge |
| Flicker free | Yes, according to the new Ecodesign / ErP directive (September 2021) |
| SVM <0.4 | Yes |
| PstLM <1 | Yes |
| SDCM | ≤3 |
| Beam angle | 36° |
| Carving dimensions | Ø75 mm |
| Installation height | 33 mm |
| Exterior dimensions | Ø88 mm |
| Dimensions driver | L: 110 mm, W: 46 mm, H: 25 mm |
| Tilt angle | 40° |
| Operating temperature | -20° - 45° |
| Possibility of through wiring | Yes, 3G1.5 - 30 pcs. |
| IP-class | IP54 (is intended for installation in areas 1 and 2) |
| Insulation class | Class II |
| Material | Aluminium, polycarbonat |
| Environment | Indoors |
| Warranty | 3 years |
| Approvals | CE |

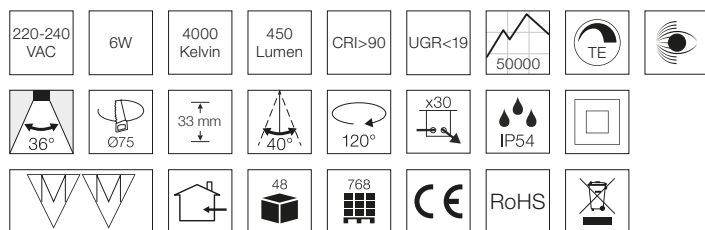

*The drawing is not drawn to scale

Product information

- Approved for installation directly in the insulation and flammable materials
- High colour rendering index (CRI)
- High lumen output
- Glare free
- Flicker free according to the new Ecodesign / ErP directive (September 2021)
- Mounting with springs
- Low mounting height
- Comes with removable driver, which makes it easy to connect the downlight for example after painting of the ceiling
- Quick and easy mounting
- Screwless terminal block in the connector box
- Ceiling thickness for mounting is up to 26 mm
- Swivel front - 120°

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

| Item no. | EAN no. | Colour | Front design |
|----------|---------------|-----------------------|--------------|
| 32111014 | 5704629001107 | Matt white (RAL 9016) | Round |
| 32111024 | 5704629001138 | Brushed alu | Round |
| 32111004 | 5704629001169 | Grey (RAL 9006) | Round |
| 32111094 | 5704629001190 | Matt black (RAL 9005) | Round |