
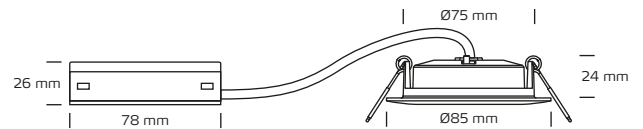


# Low Profile DOB 5W, 3000 / 4000K

## Technical data


Voltage	220-240 VAC 50 Hz
System effect	5W
Light source	LED
Colour temperature	3000 / 4000 Kelvin CCT switch
Light intensity	360 / 390 Lumen
Colour rendering	CRI>90
Expected lifespan	25.000 timer
Dimmable, how	Yes, trailing edge
Flicker free	Yes, according to the new Ecodesign / ErP directive
SVM <0.4	Yes
PstLM <1	Yes
SDCM	≤3
Beam angle	30°
Carving dimensions	Ø75 mm
Installation height	28 mm
Exterior dimensions	Ø85 mm
Dimensions driver	Driver on board (DOB)
Dimensions connector box	L: 78 mm, W: 42 mm, H: 26 mm
Tilt angle	20°
Possibility of through wiring	Yes, 2 x 3G1.5
Operating temperature	-20° - +40°
Storage temperature	-20° - +50°
IP-class, front / back	IP44 / IP20
IK-class	IK06
Insulation class	Class I
Material	Aluminium, plastic
Environment	Indoors
Warranty	3 years
Approvals	CE

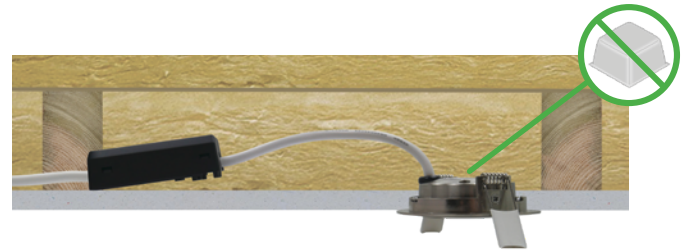

\*The drawing is not drawn to scale

## Product information

- Approved for installation directly in the insulation and flammable materials
- Low installation height (28 mm)
- High colour rendering index (CRI)
- Flicker free according to the new Ecodesign / ErP directive
- Ceiling thickness for mounting is up to 15 mm
- Must be installed with active ground wire

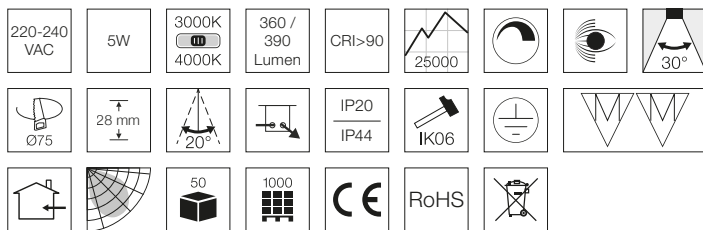

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

Item no.	EAN no.	Colour	Front design
33111013	5704629002432	Matt white, RAL 9016	Round
33111023	5704629002456	Brushed alu	Round
33111093	5704629002470	Matt black, RAL 9017	Round