


# Gabriella 90° 4W, 3000K

## Technical data


Amperage	350mA
System effect	4W
Light source	LED
Colour temperature	3000 Kelvin
Light intensity	251 Lumen
Colour rendering	CRI>90
Expected lifespan	50,000 hours L70
Dimmable, how	Yes, trailing edge
Flicker free	Yes, according to the new Ecodesign / ErP directive (September 2021)
SVM <0.4	Yes
PstLM <1	Yes
SDCM	3
Beam angle	90°
Carving dimensions	Ø55 mm
Installation height	12 mm
Exterior dimensions	Ø70 mm
Possibility of through wiring	No
IP-class	IP44 (is intended for installation in areas 1 and 2)
Insulation class	Class III
Material	Aluminium
Environment	Indoors
Warranty	2 years with Nordtronic driver
Approvals	CE

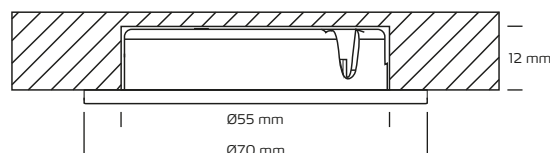

\*The drawing is not drawn to scale

## Product information

- Approved for installation directly in the insulation and flammable materials
- Low mounting depth
- Large beam angle (90°)
- Dimmable with Nordtronic LED driver
- Incl. 3 meter cable with plug
- Designed and developed in Denmark

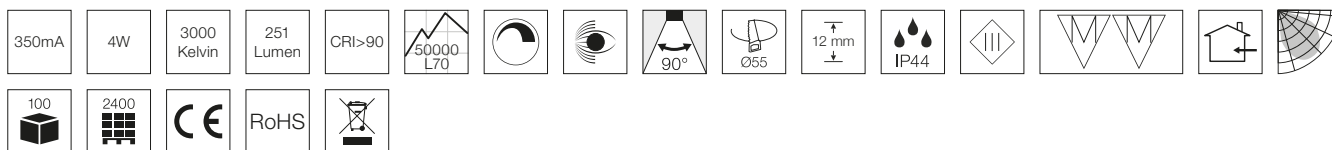

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

Item no.	EAN no.	Colour	Front design
3333	5704629033337	Matt white	Round
3334	5704629033344	Brushed alu	Round

## Accessories

Item no.	EAN no.	Variant
1872	5704629018723	LED Driver dimmable, 5-16W
1883	5704629018839	LED Driver non dimmable, 2-20W
1884	5704629018846	LED Driver dimmable, 8-20W
1875	5704629018754	Extention cable 2 m
3121	5704629031210	Mounting ring matt white
3122	5704629031227	Mounting ring brushed alu