

Low Profile Flexible G2 Large Tilt Ø75 with driver



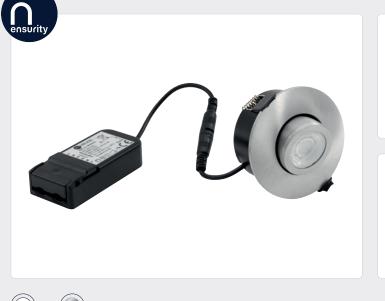




Technical data

Voltage	220-240 VAC 50/60 Hz
System effect	6W
Colour rendering	CRI>95
Expected lifespan	50,000 hours L70 B50
Dimmable, how	Yes, trailing edge
Flicker free	Yes, according to the new Ecodesign / ErP directive
SVM <0.4	Yes
PstLM <1	Yes
SDCM	≤3
Beam angle	36°
Cut out	Ø75 mm
Installation height	33 mm
Exterior dimension	Ø87 mm
Dimension driver	L: 94 mm, B: 44 mm, H: 23 mm
Tilt angle	45°
Possibility of through wiring - quantity	Yes, 2 x 3G1.5 mm ² - 30 pcs.
Operating temperature	-20° - +45°
Storage temperature	-40° - +80°
IP rating, front / back	IP44 / IP20 (is intended for installation in areas 1 and 2)
Insulation class	Class II
Material	Aluminium, plastic
Approvals	CE

Product information

- Approved for installation directly in the insulation and flammable materials
- For indoor and outdoor use
- The downlight can be driven either by a stand-alone driver or by Nordtronic's 25W driver (25W or up to 5 pcs. Ø75 mm downlight)
- Replaceable light source
- High colour rendering index CRI>95
- Flicker free according to the new Ecodesign / ErP directive
- Intended for installation in areas 1 and 2
- Quick and easy mounting with springs
- Low installation height 33 mm
- 3-pole leavers in the connector box
- Approved for through wiring 2 x 3G1.5 mm² 30 pcs.
- Possibility of mounting with cable or 16 mm flex tube
- 7 years product warranty
- Up to 10 years surface warranty

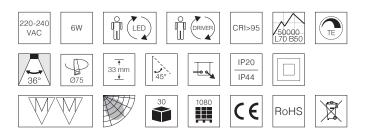

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

Please refer to our website nordtronic.com, where you can find product information, documents, dimming overview etc. All rights reserved by Nordtronic A/S | Flade Engvej 4 | DK-9900 Frederikshavn | +45 7020 9531 Subject to printing errors.

Low Profile Flexible G2 Large Tilt Ø75 with driver





Low Profile Flexible G2 Large Tilt Ø75 with driver | 2700K | 400lm

Item no.	EAN no.	Design, colour	Light source	Environment	Warranty, product / surface
35721012	5704629003606	O matt white (RAL 9010)	5W LED, Item no. 98373012	indoor and outdoor	7 years / 10 years
35721022	5704629003620	\bigcirc brushed alu	5W LED, Item no. 98373022	F indoor	7 years

Low Profile Flexible G2 Large Tilt Ø75 with driver | 3000K | 420lm

Item no.	EAN no.	Design, colour	Light source	Environment	Warranty, product / surface
35721013	5704629003613	O matt white (RAL 9010)	5W LED, Item no. 98373013	F indoor and outdoor	7 years / 10 years
35721023	5704629003637	\bigcirc brushed alu	5W LED, Item no. 98373023	F indoor	7 years