


Technical data


Amperage	Cc 500mA
System effect	5W
Colour rendering	CRI>95
Expected lifespan	50,000 hours L70 B50
Dimmable, how	Yes, trailing edge
Flicker free	Yes, according to the new Ecodesign / ErP directive
SVM <0.4	Yes
PstLM <1	Yes
SDCM	≤3
Beam angle	36°
Cut out	Ø75 mm
Installation height	33 mm
Exterior dimension	Ø87 mm
Dimension connector box	L: 62.5 mm, W: 44 mm, H: 26 mm
Tilt angle	45°
Possibility of through wiring	Yes, 2 x 2G1.5 mm ²
Operating temperature	-20° - +45°
Storage temperature	-40° - +80°
IP rating, front / back	IP44 / IP20 (is intended for installation in areas 1 and 2)
Insulation class	Class III
Material	Aluminium, plastic
Approvals	CE

Product information

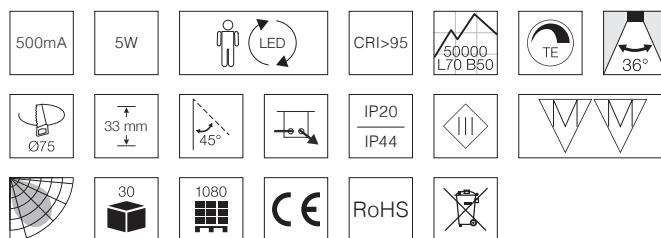

- Approved for installation directly in the insulation and flammable materials
- For indoor and outdoor use
- The downlight can be driven either by a stand-alone driver or by Nordtronic's 25W driver (25W or up to 5 pcs. Ø83 mm downlight)
- Replaceable light source
- High colour rendering index – CRI>95
- Flicker free according to the new Ecodesign / ErP directive
- Intended for installation in areas 1 and 2
- Quick and easy mounting with springs
- Low installation height – 33 mm
- 3-pole leavers in the connector box
- Approved for through wiring – 2 x 2G1.5 mm²
- Possibility of mounting with cable or 16 mm flex tube
- 7 years product warranty
- Up to 10 years surface warranty



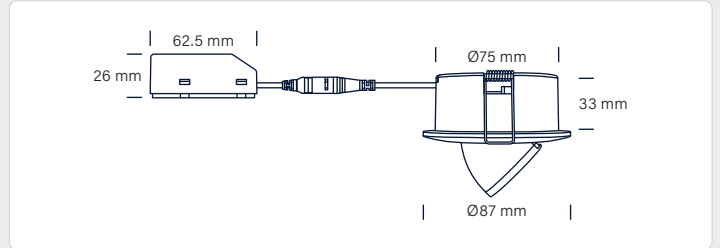

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.



Low Profile Flexible G2 Large Tilt Ø75 with serial connector | 2700K | 400lm

Item no.	EAN no.	Design, colour	Light source	Environment	Warranty, product / surface
35722012	5704629003644	○ matt white (RAL 9010)	5W LED, Item no. 98373012	 indoor and outdoor	7 years / 10 years
35722022	5704629003668	○ brushed alu	5W LED, Item no. 98373022	 indoor	7 years

Low Profile Flexible G2 Large Tilt Ø75 with serial connector | 3000K | 420lm

Item no.	EAN no.	Design, colour	Light source	Environment	Warranty, product / surface
35722013	5704629003651	○ matt white (RAL 9010)	5W LED, Item no. 98373013	 indoor and outdoor	7 years / 10 years
35722023	5704629003675	○ brushed alu	5W LED, Item no. 98373023	 indoor	7 years