


Technical data

Voltage	220-240 VAC 50/60 Hz
System effect	40W
Light source	LED E
Colour temperature	4000 Kelvin
Light intensity	4000 Lumen, 100lm/W
Colour rendering	CRI>80
Glare	UGR<22
Expected lifespan	50.000 hours
Flicker free	Yes, according to the latest Ecodesign / ErP directive
SVM <0.4	Yes
PstLM <1	Yes
SDCM	<6
Beam angle	120°
Cut out	570 x 570 mm
Installation height	34 mm
Exterior dimension	595 x 595 mm
Dimension driver	L: 98 mm, W: 41 mm, H: 26 mm
Dimension connector box	L: 78 mm, W: 42 mm, H: 26 mm
Possibility of through wiring	Yes 2 x 3G1.5 mm ²
Operating temperature	-20° - +40°
IP rating	IP20
IK rating	IK02
Insulation class	Class II
Material	Plastic, metal
Environment	Indoor
Warranty	5 years
Approvals	CE

Product information

- Inkl. driver
- 595 x 595 mm
- 40W
- 100lm/W @4000K
- UGR<22
- Expected lifespan: 50.000 hours
- 5 years warranty

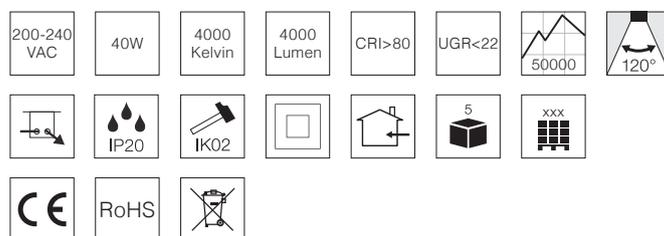

ECotech Panel 60 x 60 with driver

Item no.	EAN no.	Colour
38602034	5704629006249	matt white

Accessories

Item no.	EAN no.	item
98957093	5704629006287	mounting frame
98958093	5704629006294	spring set

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.