


## Technical data

Voltage	Cc 850mA
System effect	32W
Light source	LED <span style="border: 1px solid black; padding: 2px;">D</span>
Colour temperature	4000 Kelvin
Light intensity	3840 Lumen, 120lm/W
Colour rendering	CRI>80
Glare	UGR<19
Expected lifespan	50.000 hours
Flicker free	Yes, according to the latest Ecodesign / ErP directive
SVM <0.4	Yes
PstLM <1	Yes
SDCM	<6
Beam angle	120°
Cut out	570 x 570 mm
Installation height	34 mm
Exterior dimension	595 x 595 mm
Operating temperature	-20° - +40°
IP rating	IP20
IK rating	IK02
Insulation class	Class II
Material	Plastic, metal
Environment	Indoor
Warranty	5 years
Approvals	CE

## Product information

- Excl. driver
- 595 x 595 mm
- 32W
- 120lm/W @4000K
- UGR<19
- Expected lifespan: 50.000 hours
- 5 years warranty

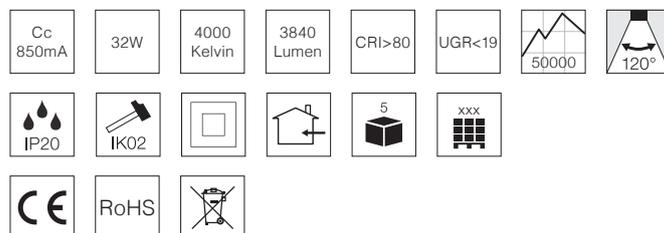

## ECotech Panel 60 x 60 UGR<19 without driver

Item no.	EAN no.	Colour
38610034	5704629006263	matt white

## Accessories

Item no.	EAN no.	item
98957093	5704629006287	mounting frame
98958093	5704629006294	spring set

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.