


Technical data

Voltage	220-240 VAC 50/60 Hz
Light source	LED D
Cos Phi / Power factor	0.9
Colour temperature	4000 Kelvin
Colour rendering	CRI>80
Expected lifespan	50,000 hours
Dimmable	Yes, DIP switch
Flicker free	Yes, according to the latest Ecodesign / ErP directive
SVM <0.4	Yes
PstLM <1	Yes
SDCM - LED	<3
Beam angle	120°
Possibility of through wiring	Ja, 2 x 3G2.5 mm ²
Operating temperature	-20° - +45°
IP rating	IP65
IK rating	IK08
Insulation class	Class I
Material	Polycarbonate
Environment	Indoor and outdoor
Warranty, product / surface	5 years
Approvals	CE

Product information

- Approved for common access routes
- Dimmable via DIP switch - Power select
- High lumen output - 120 Lumen/W
- Flicker free according to the latest Ecodesign / ErP directive
- Through wired - 2.5 mm²
- Possibility of through wiring - 2 x 3G2.5 mm²
- For mounting on both ceiling and wall
- Surface mounted bracket that can be moved 200 mm for easy installation adjustment
- The cover can stay attached to the clips during installation
- LED plate is secured by suspension belts to make installation easy
- Clips in stainless steel

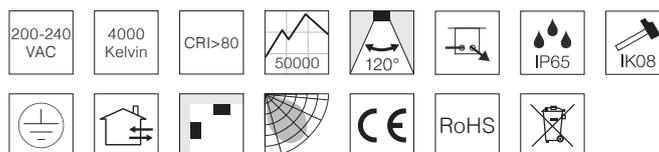


ECOtech Waterproof IP65 | 1200 mm



ECOtech Waterproof IP65 | 1500 mm



NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

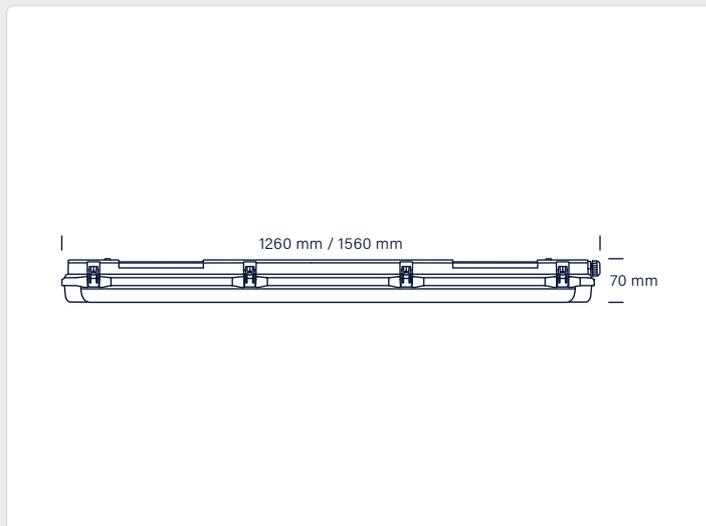

ECOftech Waterproof IP65

Item no.	EAN no.	System effect	Colour temperature	Light intensity	Exterior dimension	Colour
52311204	5704629006768	25W	4000 Kelvin	3300 Lumen	L: 1260 mm, W: 89 mm, H: 70 mm	grey
		30W		3800 Lumen		
		35W		4300 Lumen		
		40W		4800 Lumen		
52311504	5704629006775	35W	4000 Kelvin	4800 Lumen	L: 1560 mm, W: 89 mm, H: 70 mm	grey
		45W		5900 Lumen		
		55W		7100 Lumen		
		60W		7300 Lumen		