


Fast Install excl. light source


Technical data

Voltage	220-240 VAC 50 Hz
Light source	Max. 7.5W LED
Carving dimensions	Ø75 mm
Installation height	63 mm
Exterior dimensions	Ø87 mm
Dimensions connector box	L: 85 mm, W: 55 mm, H: 30 mm
Tilt angle	30°
Possibility of through wiring	Yes, 3G1,5
IP-class, front / back	IP44 / IP20
Insulation class	Class II
Material	Aluminium, plastic
Environment	Indoor
Warranty, product / surface	5 years / 2 years
Approvals	CE

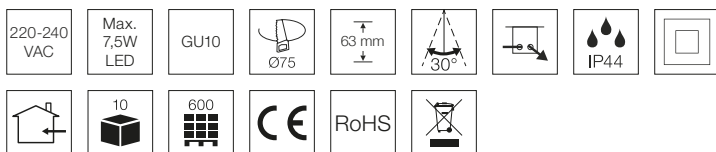

Product information

- Approved for installation directly in the insulation and flammable materials
- Low mounting depth
- Quick and easy mounting
- Mounting with adjustable springs
- Screwless terminal block in the connector box
- Possibility of mounting with cable or 16 mm flex tube
- Adjustable springs for ceiling thickness up to 44 mm
- Designed and developed in Denmark

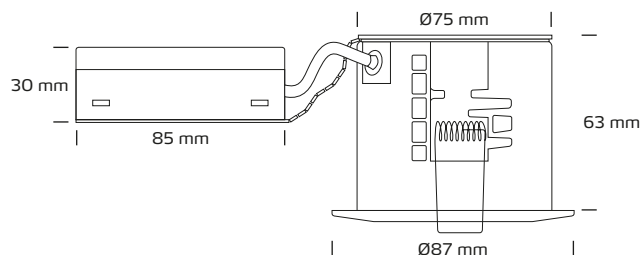

*The drawing is not drawn to scale

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

Item no.	EAN no.	Colour	Front design
7011110	5704629002036	Matt white	Round
7011120	5704629002043	Brushed alu	Round