


Technical data

Voltage	220-240 VAC 50/60 Hz
System effect	Max. 7.5W LED
Cut out dimension	Ø75 mm
Installation height	63 mm
Exterior dimensions	Ø87 mm
Dimension connector box	L: 78 mm, W: 42 mm, H: 26 mm
Tilt angle	30°
Possibility of through wiring	Yes, 2 x 3G1.5 mm ²
Operating temperature	-20° - +45°
IP rating, front / back	IP44 / IP20
Insulation class	Class II
Material	Aluminium, plastic
Environment	Indoor
Warranty	5 years
Approvals	CE

Product information

- Produced from a minimum of 90% recycled materials
- Approved for installation directly in the insulation and flammable materials
- Low mounting depth – 63 mm
- Quick and easy mounting with screws or adjustable springs
- Screwless terminal block in the connector box
- Possibility of mounting with cable
- Adjustable springs for ceiling thickness up to 44 mm
- Adjustable screws for ceiling thickness up to 35 mm
- 10 pcs. in a box

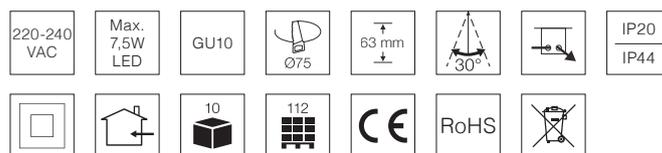

Item no.	EAN no.	Design / colour	Environment	Warranty
70133110	5704629005785	○ matt white (RAL 9010)	indoor	5 years
70133120	5704629005792	○ brushed alu	indoor	5 years

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.