

Dali relay


Technical data

Supply	Via DALI-line
Consumption	2.7 mA
Relay output switch on / off voltage	250VAC
Max. switching current	16A
No / Nc	1 changeover
Connecting wire cross section	2.5 mm ²
Exterior dimensions	L: 58.5 mm, W: 32.5 mm, H: 15 mm
IP-class	IP20
Material	Plastic
Warranty	2 years
Approvals	CE



Product information

- Compact relay module for the direct control of 230V AC loads via DALI
- Fixtures without DALI-input can be easily integrated in a DALI lighting control system. The fixture can then be switched ON and OFF by DALI commands
- The DALI RM 16 is supplied directly by the DALI signal line

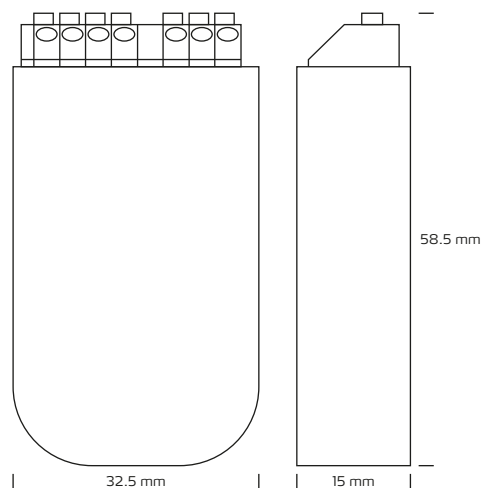

*The drawing is not drawn to scale

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

Item no.	EAN no.	Type
98413000	5704629000391	Relay