

Box Relay Dali

Technical data


Voltage	Max. 230VAC / 30VDC
Output current	Max. 4.3A
Max. load	1000W
Max. thermal loss	1.2W
Supply from Dali bus, Dali bus load	≤3mA
Exterior dimensions	L: 45.5 mm, W: 45 mm, H: 20.5 mm
IP-class	IP20
Material	Plastic
Environment	Indoors
Warranty	2 years
Approvals	CE



Product information

- Dali relay module 300W LED / 1000W Conventional incandescent and halogen light sources
- Dali bus powered, no extra power supply required
- 1 Dalli address can be assigned by Dali master controller
- Compact relay module on / off for standard loads via Dali
- Loads that do not have a Dali input can therefore be integrated in the Dali circuit
- The loads can be switched on and off via Dali
- Compatible with universal Dali systems and master controllers in the market
- Mini size, easy to be installed into a standard 86 x 86 mm wall box
- **DO NOT** expose the device to moisture
- **DO NOT** install the device, when connected to power

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

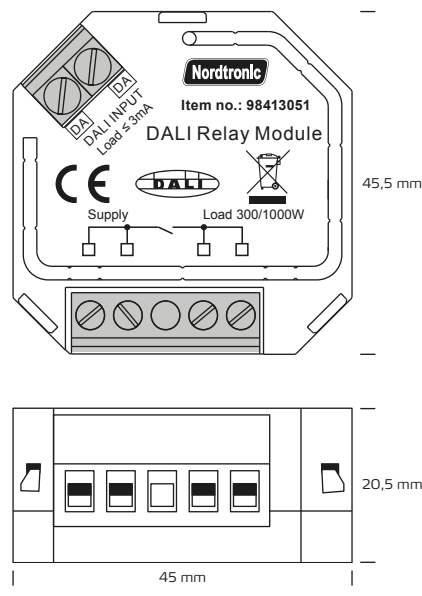

*The drawing is not drawn to scale

Item no.	EAN no.	Colour
98413051	5704629000957	Blue