


# Box Dimmer Dali


## Technical data

Voltage	100-240VAC
Output current	Max. 1.5A
Max. dimmer load	400W
Max. thermal loss	4W
Dimming	Trailing edge (TE)
Dali bus load	≤2mA
Exterior dimensions	L: 45.5 mm, W: 45 mm, H: 20.5 mm
IP-class	IP20
Material	Plastic
Environment	Indoors
Warranty	2 years
Approvals	CE

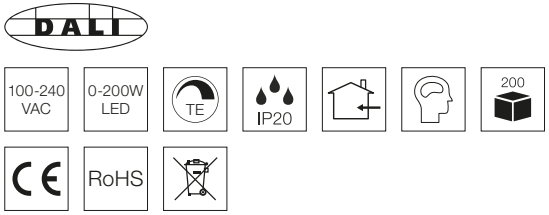

## Product information

- DALI Trailing edge dimming: LED 0-200W / Halogen 0-400W
- 1 Dali address to control 1 Channel Output, Up to 400W
- Input and Output with screw terminals, safe and reliable
- Innovative minimum brightness setting function
- Can be controlled by universal 8-230V input single wire push switch
- Complies to Dali standards IEC 62386-102, IEC 62386-207
- Compatible with universal Dali systems and master controllers in the market
- Mini size, easy to be installed into a standard 86 x 86 mm wall box
- **DO NOT** expose the device to moisture
- **DO NOT** install the device, when connected to power

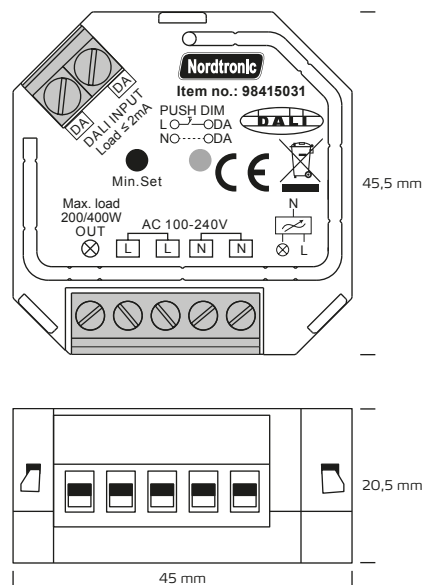

\*The drawing is not drawn to scale

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

Item no.	EAN no.	Colour
98415031	5704629000964	Blue