

Wireless Switch Zigbee


Technical data

Height:	12 mm
Length:	56 mm
Width:	56 mm
Voltage:	3VDC
Power supply:	3V (CR2430 battery) Expected battery life is 2 years in normal use
Transmission frequency:	2.4GHz
Transmission range (free field):	30 m
IP-class:	IP20
Material:	Plastic
Dimming:	0.1%-100%



Product information

- RGB+CCT+DIM Wireless Switch Zigbee based on Zigbee 3.0
- Supports 1 group for binding max. 30 lighting devices
- Supports Touchlink to pair to a lighting device directly
- Long battery life mesh technology
- Transmission range up to 30 m
- Enables to bind and control Box Dimmer / Relay, RGBW and RGB+CCT Zigbee lighting devices
- Wireless Switch Zigbee is attached to the base by magnetism. It can therefore easily and quickly be dismantled and used as a portable remote control
- This device contains a button lithium battery that shall be stored and disposed properly
- **DO NOT expose the device to moisture**

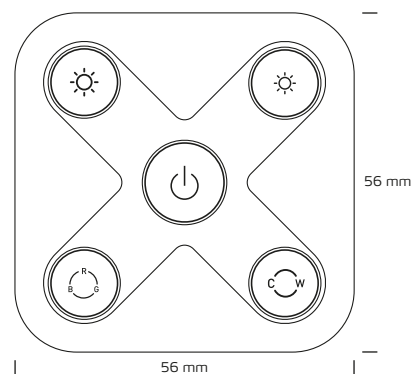


*The drawing is not drawn to scale

Item no.	EAN no.	Colour
98426061	5704629000933	White

Box Dimmer 2.0



Technical data

Height:	20,5 mm
Length:	45,5 mm
Width:	45 mm
Voltage:	100-240VAC 50 Hz
IP-class:	IP20
Material:	Plastic
Max. dimmer load:	400Va
Dimming:	Trailing edge



Produktinformation

- Input and output with screw terminals, safe and reliable
- Trailing edge dimming: LED 0-200W / Halogen 0-400W
- Can directly pair to a compatible Zigbee Gateway
- Can be controlled by universal 8-230V input single wire push switch
- Mini size, easy to be installed into a standard 86 x 86 mm wall box
- Radio Frequency: 2.4GHz

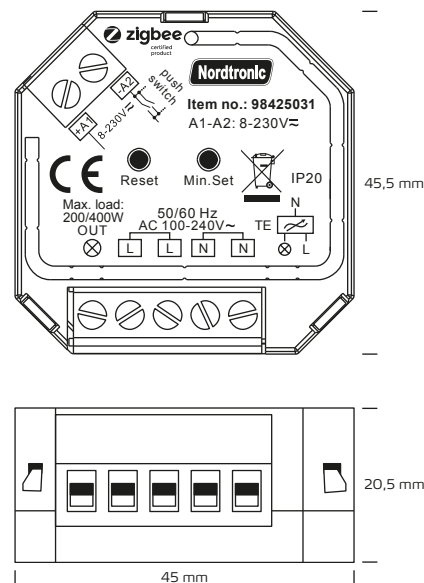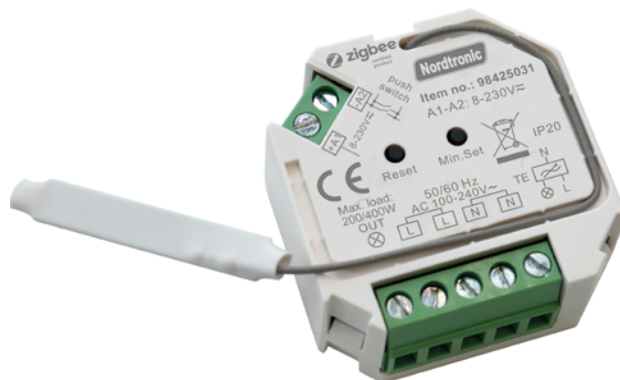

*The drawing is not drawn to scale

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

Item no.	EAN no.	Colour
98425031	5704629000667	White