


Technical data

Primary Voltage	220-240VAC
Secondary amperage	350 - 1050mA
Min. load	8.75W
Max. load	45W
Efficiency	+87%
Leakage current	
Fuse	Built-in thermal fuse with auto reset
Expected lifespan	50,000 hours
Cable with plug from secondary side	Yes, 11.9 cm
Connection cable on primary side	5-pole connector box for loop in and out with dali / Push and mains
Dimensions driver	L: 135 mm, W: 72 mm, H: 25 mm
Dimensions connector box	L: 85 mm, W: 55 mm, H: 30 mm
Possibility of through wiring	Yes, 2 x 5G2,5 mm ²
Operating temperature	-20° / +50°
IP rating	IP20
Insulation class	Class II
Material	Plastic
Environment	Indoors
Warranty	5 years
Approvals	CE

Product information

- Possibility for loop in and out with dali / Push and mains
- Built-in thermofuse with auto reset
- Quick and easy installation
- The driver can only be regulated via Dali or push dim
- **Do NOT plug in any LED lamps, when connected to power**
- Fits ECOtech Panel 60 x 60 UGR<19, item no. 38610034

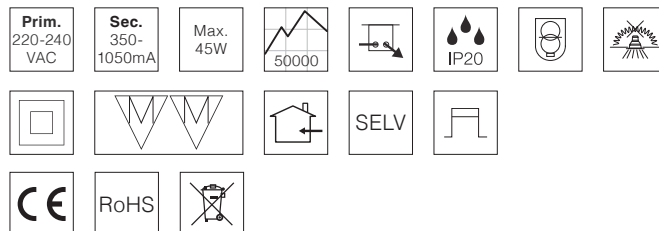

Item no.	EAN no.	Type
98525049	5704629006539	Dali / Push dim

Max. LED driver per circuit breaker

Circuit breaker	A ms	B13	B16	C13	C16
	5A@300ms	23	28	48	59

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.