



Technical data


Primary voltage	220-240VAC 50/60 Hz
Secondary amperage	350mA
Min. load	10W
Max. load	17W
Efficiency	+84%
Vout range	28-50 Vdc
Dimmable	Yes, leading or trailing edge
Fuse	Built-in thermal fuse with auto reset
Distribution box on secondary side	Yes, with 6 outputs
Cable from the secondary side	Yes, 11.9 cm to distribution box
Connection cable on primary side	Yes, 1.96 m cable equipped with 2P plug
Possibility of attachment	Yes, using two screws
Dimensions driver	L: 116 mm, W: 91 mm, H: 25 mm
Dimensions distribution box	L: 59 mm, W: 38 mm, H: 11 mm
Ambient temperature range ta	-25° - +45°
Storage temperature range	-20° - +70°
Mains switching cycles	>100,000
Leakage current	0.37mA
IP rating	IP20
Insulation class	Class II, SELV
Material	Plastic
Environment	Indoor
Warranty	5 years
Approvals	CE

Max. LED driver per circuit breaker

Circuit breaker	B10	B13	B16	C10	C13	C16
Max. number	67	86	107	67	86	107

Product information

- LED driver for cabinet lighting and mini downlights (350mA, 6 outputs)
- Dimmable – leading or trailing edge
- Built-in thermofuse with auto reset
- Quick and easy installation
- Can be fastened by screws
- Do NOT plug in any LED lamps, when connected to power**

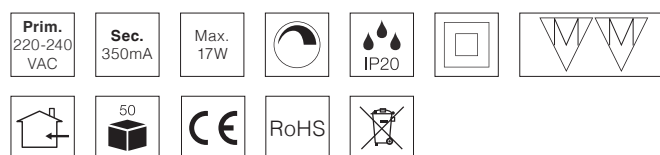

Item no.	EAN no.	Type
98544026	5704629004986	dimmable

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.