


## Technical data

Primary Voltage	220-240VAC
Secondary amperage	850mA +/-5%
Min. load	23W
Max. load	45W
Efficiency	+88%
Leakage current	<6mA
Fuse	Built-in thermal fuse with auto reset
Expected lifespan	50,000 hours
Dimmable	Yes, leading and trailing edge
Cable with plug from secondary side	Yes, 11.9 cm
Connection cable on primary side	3-pole connector box for loop in and out
Dimensions driver	L: 166 mm, W: 52 mm, H: 24 mm
Dimensions connector box	L: 78 mm, W: 42 mm, H: 26 mm
Possibility of through wiring	Yes, 2 x 3G2.5 mm <sup>2</sup>
Operating temperature	-20° - +45°
IP rating	IP20
Insulation class	Class II
Material	Plastic
Environment	Indoors
Warranty	5 years
Approvals	CE EN 61347-2-13 EN 55015 EN 61000-3-2 Class C EN 61547

## Product information

- Possibility for loop in and out
- Built-in thermofuse with auto reset
- Quick and easy installation
- Dimmable - leading and trailing edge
- **Do NOT plug in any LED lamps, when connected to power**
- Fits ECotech Panel 60 x 60 UGR<19, item no. 38610034

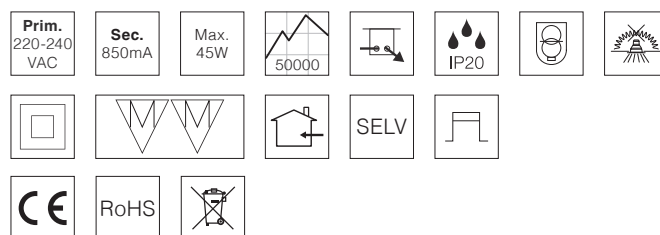

Item no.	EAN no.	Type
98544883	5704629006331	Triac Dim

## Max. LED driver per circuit breaker

Circuit breaker	A ms	B10	B13	B16	B20
	5A@300ms	35	46	57	71
Circuit breaker	A ms	C10	C13	C16	C20
	5A@300ms	35	46	57	71

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.